



Econo Wood

Office, Retail, Hospitality





LG Hausys
floors **Econo Wood**



DEW 2228



DEW 2561



DEW 2712



DEW 2751



DEW 2752



DEW 2753



DEWN 2774



DEWN 2775



DEW 3201



DEW 6621

Classification for burning behavior of building materials and products (GB8624-2012)

Item	Standards	Requirements		Test Result	Assessment
Flame spread	GB/T 8626-2007	B ₁₁	≤150	60	Qualified
Critical radiant flux	GB/T 11785-2005	B ₁₁	≥8.0	10	Qualified
Make density	GB/T 11785-2005	s1	≤750	35	Qualified
Smoke toxicity	GB/T 20285-2006	t0	ZA ₁	ZA1	Qualified

The fire-resistant performance of DELUXE achieved class Bf1-s1, 10, GB8624-2006.


Component restricts of semirigid polyvinyl chloride floor tiles (GB/T 4085-2005)

Item	Reference value	Test Result	Assessment
Vinyl chloride monomer (VCM)	≤5	<0.3	Qualified
Lead (Pb)	≤20	0.74	Qualified
Cadmium (Cd)	≤20	0.094	Qualified
Volatile	≤10	2.5	Qualified


General Specifications

2.0T: 2.0mm(T) x 180mm x 920mm(L) 30Pcs./Box(4.968m2)

Product structure

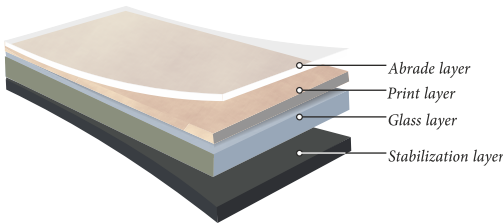

Component comparison

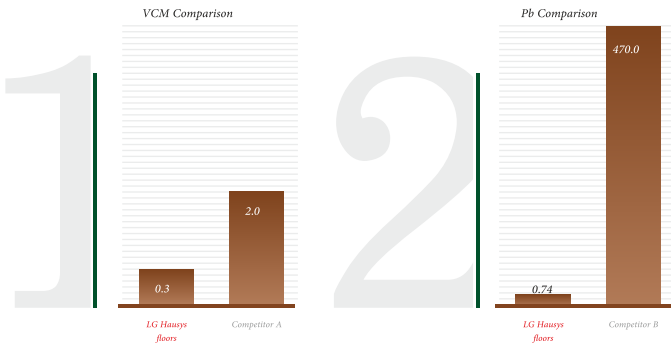

According to GB18586-2001, the component of VCM should be less than 0.3mg/kg.

According to GB18586-2001, the component of Pb should be less than 20mg/m².



Our Papular Products :

Easy Clean Pet

Residential 1.8mm x 1.83M x 40/50M

Palace

Residential, Office 1.5mm x 2M x 25M

Bright

Residential, Office, Retail 1.6mm x 2M x 25M

Supreme

Office zone, Retail, Multipurpose 1.8mm x 2M x 20M

Delight

Shop, Hospital, School Etc. 2.2mm x 2M x 20M

Leisure

Gymnasium, Sports Center, Education 4mm x 1.8M x 16M

Eg Floor

Gymnasium, Yoga, Library, Preschool 6mm x 1.83M x 13M

Rexcourt

Sports, Gymnasium, Multipurpose 6.5mm x 1.8M x 15M

Origin

Healthcare, Education, Retail 2mm x 2M x 20M

All Road

Healthcare, Education, Retail 2mm x 2M x 20M

Unite

Healthcare, Education, Retail 2mm x 2M x 20M

Vip Conductive Tile

Electronics, IT, Healthcare, Access Floor 2mm x 600mm x 600mm